


Overview

HP ProDesk 490 G1 Microtower Business PC

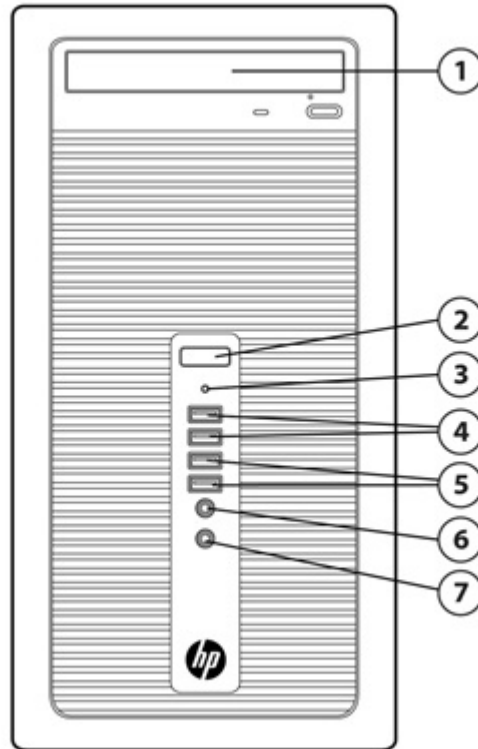

1. Drive bay supporting an optical disk drive (optional)
2. Power button
3. PC status LED
4. (2) USB 3.0 ports (black)
5. (2) USB 2.0 ports (blue)
6. 3.5mm microphone jack
7. 3.5mm headphone output

Not Shown

5.25 External Drive Half-Height Drive Bay (located behind removable bezel)

3.5 External drive bay used for installing a Media Card Reader

Slots (1) PCI Express x16 graphics connectors
 (3) PCI Express x1 accessory connectors
 (1) USB 3.0 header for media card reader
 (1) Parallel port (optional)

Bays (2) 3.5 Internal storage drive bays

Rear I/O (4) USB 2.0 ports (2) USB 3.0 ports

Overview

- (1) VGA video port[†](1) DVI-D video port[†]DisplayPort with Multi-Stream support - DP 1.2 (Optional)
- (1) RJ-45 network connector
- (1) RS-232 serial port
- (1) RS-232 serial (optional)
- 3.5mm audio in/out jacks
- PS/2 keyboard and mouse ports

Overview

At A Glance

- Expandable, upgradable chassis and system board
- HP developed and engineered UEFI BIOS supporting security, manageability and software image stability
- Intel® H87 Express chipset supporting Intel® 4th generation Core processors, featuring integrated Intel HD Graphics Realtek RTL8151GH-CG GbE LOM integrated network connection
- DDR3 Synchronous Dynamic Random Access Memory (SDRAM)
- Three independent monitor support via VGA and DVI-D video interfaces and optional DisplayPort with Multi-stream support - DP 1.2
- Discrete graphics options available for all platforms
- DTS Sound + audio management software
- Standard and high efficiency energy saving power supply options
- ENERGY STAR® qualified models certified EPEAT® Gold
- Can be configured with multiple drives in a RAID array
- Optional Intel Smart Response Technology disk cache modules¹

¹Intel® Smart Response Technology disk cache modules planned to be available December, 2013.

Standard Features and Configurable Components (availability may vary by country)

OPERATING SYSTEM

Preinstalled When Purchased	Windows 8.1 Pro (64-bit)
	Windows 8.1 (64-bit)
	Windows 7 Ultimate (32-bit)**
	Windows 7 Ultimate (64-bit)**
	Windows 7 Professional (32-bit)**
	Windows 7 Professional (64-bit)**
	Windows 7 Professional (32-bit) (available through downgrade rights from Windows 8.1 Pro)***
	Windows 7 Professional (64-bit) (available through downgrade rights from Windows 8.1 Pro)***
	Windows 7 Home Premium (32-bit)**
	Windows 7 Home Premium (64-bit)**
	Windows 7 Home Basic (32-bit)**
	FreeDOS 2.0
	Novell SUSE Linux Enterprise Desktop 11

*Not all features are available in all editions of Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8.1 functionality. See <http://www.microsoft.com>.

**Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

***This system is preinstalled with Windows 7 Pro software and also comes with a license and media for Windows 8.1 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

PROCESSORS

Intel® 4th Generation Core™ i7 Processors

Intel® Core™ i7-4770 Processor

Up to 3.9 GHz Max. Turbo Frequency (3.4 GHz base frequency)

8 MB cache, 4 cores, 8 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i7-4771 Processor

Up to 3.9 GHz Max. Turbo Frequency (3.5 GHz base frequency)

8 MB cache, 4 cores, 8 threads

Intel HD Graphics 4600

Supports DDR3 memory up to 1600 MT/s data rate

Standard Features and Configurable Components (availability may vary by country)

Intel® Core™ i7-4770S Processor

Up to 3.9 GHz Max. Turbo Frequency (3.1 GHz base frequency)
8 MB cache, 4 cores, 8 threads
Intel HD Graphics 4600
Supports DDR3 memory up to 1600 MT/s data rate

Intel® 4th Generation Core™ i5 Processors

Intel® Core™ i5-4570 Processor

Up to 3.6 GHz Max. Turbo Frequency (3.2 GHz base frequency)
6 MB cache, 4 cores, 4 threads
Intel HD Graphics 4600
Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i5-4570S Processor

Up to 3.6 GHz Max. Turbo Frequency (2.9 GHz base frequency)
6 MB cache, 4 cores, 4 threads
Intel HD Graphics 4600
Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i5-4670 Processor

Up to 3.8 GHz Max. Turbo Frequency (3.4 GHz base frequency)
6 MB cache, 4 cores, 4 threads
Intel HD Graphics 4600
Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i5-4670S Processor

Up to 3.8 GHz Max. Turbo Frequency (3.1 GHz base frequency)
6 MB cache, 4 cores, 4 threads
Intel HD Graphics 4600
Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i5-4430 Processor

Up to 3.2 GHz Max. Turbo Frequency (3.0 GHz base frequency)
6 MB cache, 4 cores, 4 threads
Intel HD Graphics 4600
Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i5-4430s Processor

Up to 3.2 GHz Max. Turbo Frequency (2.7 GHz base frequency)
6 MB cache, 4 cores, 4 threads
Intel HD Graphics 4600
Supports DDR3 memory up to 1600 MT/s data rate

Intel® 4th Generation Core™ i3 Processors

Intel® Core™ i3-4340 Processor

Up to 3.6 GHz Max. Turbo Frequency (3.6 GHz base frequency)
4 MB cache, 2 cores, 4 threads
Intel HD Graphics 4600
Supports DDR3 memory up to 1600 MT/s data rate

Standard Features and Configurable Components (availability may vary by country)

Intel® Core™ i3-4330 Processor

Up to 3.5 GHz Max. Turbo Frequency (3.5 GHz base frequency)
4 MB cache, 2 cores, 4 threads
Intel HD Graphics 4600
Supports DDR3 memory up to 1600 MT/s data rate

Intel® Core™ i3-4130 Processor

Up to 3.4 GHz Max. Turbo Frequency (3.4 GHz base frequency)
3 MB cache, 2 cores, 4 threads
Intel HD Graphics 4400
Supports DDR3 memory up to 1600 MT/s data rate

Intel® Pentium Processors

Intel® Pentium G3430 Processor

Up to 3.3 GHz Max. Turbo Frequency (3.3 GHz base frequency)
3 MB cache, 2 cores, 2 threads
Intel HD Graphics
Supports DDR3 memory up to 1600 MT/s data rate

Intel® Pentium G3420 Processor

Up to 3.2 GHz Max. Turbo Frequency (3.2 GHz base frequency)
3 MB cache, 2 cores, 2 threads
Intel HD Graphics
Supports DDR3 memory up to 1600 MT/s data rate

Intel® Pentium G3220 Processor

Up to 3.0 GHz Max. Turbo Frequency (3.0 GHz base frequency)
3 MB cache, 2 cores, 2 threads
Intel HD Graphics
Supports DDR3 memory up to 1600 MT/s data rate

CHIPSET

Intel® 8 Series (H87 Express) Chipset

GRAPHICS

Intel HD Graphics on all models (integrated on processor)

AMD Radeon HD 8350 (1GB) FH PCIe x16
AMD Radeon HD 8350 (1GB) PCIe x16
AMD Radeon HD 8470 (2GB) FH
AMD Radeon HD 8490 (1GB) PCIe x16
NVIDIA GeForce GT630 (2GB) FH PCIe x16
NVIDIA NVS 310 x16 1st (no cbl)
NVIDIA NVS 315 (1GB) PCIe x1

Standard Features and Configurable Components (availability may vary by country)

ADAPTERS AND CABLES

- HP DMS-59 to Dual DisplayPort Cable
- HP DMS-59 to Dual DVI Cable
- HP DMS-59 to Dual VGA Cable
- HP DisplayPort to DisplayPort Cable
- HP DisplayPort to DVI-D Adapter
- HP DisplayPort to HDMI Adapter
- HP DisplayPort to VGA Adapter
- HP Serial Port Adapter
- HP Parallel Port Adapter
- HP DisplayPort Cable

STORAGE

SATA Drives

- 500 GB, 7.2K rpm, SATA 6.0 Gb/s, SMART IV, 3.5" (with 3.5" adapter)
- 1 TB, 7.2K rpm, SATA 6.0 Gb/s, SMART IV, 3.5" (with 3.5" adapter)
- 2 TB, 7.2K rpm, SATA 6.0 Gb/s, SMART IV, 3.5" (with 3.5" adapter)

Hybrid Drives

- 500 GB SATA 6G 2.5 (8GB cache) SSHD Drive (with 3.5" adapter)
- 500 GB SATA 6G 2.5 2nd Drive (8 GB cache) SSHD Drive (with 3.5" adapter)
- 1 TB SATA 6G 2.5 (8 GB cache) SSHD Drive (with 3.5" adapter)
- 1 TB SATA 6G 2.5 2nd Drive (8 GB cache) SSHD Drive (with 3.5" adapter)

Solid State Drives

- 128 GB SATA 6G 2.5 SSD (with 3.5" adapter)
- 128 GB SATA 6G 2.5 2nd SSD (with 3.5" adapter)

Self-encrypting Solid State Drive

- 256 GB SATA 2.5" Self-Encrypting (SED) Solid State Drive (with 3.5" adapter)
- 256 GB SATA 2.5" 2nd Self-Encrypting (SED) Solid State Drive installed w/caddy

Optical Disc Drive

Standard Features and Configurable Components (availability may vary by country)

Blu-ray BDXL Writer
SuperMulti DVD Writer
DVD-ROM

MEMORY

Form Factor	Type	Maximum	# of Slots
Microtower	DDR3 non-ECC Up to 1600 MT/s	32 GB	4 UDIMM

NOTE—For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Memory modules support data transfer rates up to 1600 MT/s[†]—actual data rate is determined by the system's configured processor. See processor specifications for supported memory data rate.

PERFORMANCE

Intel® Smart Response Technology Disk Cache Modules

32GB SATA Solid State Disk Cache*

*Intel® Smart Response Technology disk cache modules planned to be available December, 2013.

NETWORKING/COMMUNICATIONS

Ethernet (RJ-45)

Realtek RTL8151GH-CG GbE LOM (standard)

Intel Ethernet I210-T1 PCIe x1 Gb Network Interface Card (optional)

Wireless

Intel® Dual Band Wireless-N 7260 802.11 a/b/g/n PCI Express (optional)*

*Intel® Dual Band Wireless-N 7260 planned to be available December, 2013.

AUDIO/MULTIMEDIA

HD audio with Realtek ALC221 codec (all ports are stereo)

DTS Studio Sound audio management technology

Microphone and headphone front ports (3.5mm)

Line-out and Line-In rear Ports (3.5mm)

Multi-streaming capable

Internal speaker (standard)

Standard Features and Configurable Components (availability may vary by country)

KEYBOARDS AND POINTING DEVICES

Keyboard

HP PS/2 Keyboard

HP USB Keyboard

USB Smart Card (CCID) Keyboard

HP USB and PS/2 Washable Keyboard

HP Wireless Keyboard and Mouse Combo*

* Keyboard contains 25% post-consumer recycled plastic material.

Mice

HP PS/2 Mouse

HP USB Mouse

HP USB 1000dpi Laser Mouse

HP USB and PS/2 Washable Mouse

HP BIOS

Key features of the HP BIOS include=

- UEFI specification 2.3.1
- Absolute Persistence Agent - To ensure tracking and tracing services remains active, available in select countries, separate software and purchase of a subscription is required.
- Thermal and power management - The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance - Industry leading acoustic emissions across the range of operating conditions.
- Serviceability - HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery - HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (DOSFlash), BIOS updates from within Windows (HPQFlash), HP Client Manager, and fail-safe recovery. In addition, the BIOS has the capability to replicate settings across all like systems in the Enterprise using the Replicated Setup option in BIOS Setup, or using tools available from the HP support website in the Business Desktop BIOS Utilities and BIOS Configuration Utility packages.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.

Additional HP BIOS features=

- Power-On password - Helps prevent an unauthorized user from powering on the system.
- Administrator password - Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) - Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage.
- S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 1W in S5 (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality.

Standard Features and Configurable Components (availability may vary by country)

MANAGEABILITY

Fully manageable and supported by industry-standard HP Client Management Solutions. Optional LANDesk management tools simplify mobile device management and security. Simplify everything from deployment or migration to daily management, security, licensing, and more-and stop downtime before it starts.

- Hardware Management—Inventory, Device config and BIOS updates, HW alerting, Driver updates
- Software Management—Deployment, App Management, Patch Management—Deployment and Migration—Proactive HW and SW Management—Mobile Users and Device Management—Remote Assistance / Help Desk
- LANDesk Management Suite 9.5 (LDMS) - optional - contact HP representative for part numbers
- Hardware integration with Microsoft System Center Configuration Manager—Client Integration Kit (CIK), Client Catalog, Client Driver Packs
- HP SoftPaq Download Manager (SDM)
- HP System Software Manager (SSM)
- HP BIOS Configuration Utility (BCU)
- HP Driver Packs
- HP Client Management Interface (HP CMI)
- Absolute Persistent Software.

SECURITY

Trusted Platform Module (TPM) 1.2 (Common Criteria EAL4+ certified)	N/A
SATA port disablement (via BIOS)	X
Drivelock	N/A
RAID configurations	X
Intel® Identify Protection Technology (IPT)*	N/A
Serial, parallel, USB enable/disable (via BIOS)	X
Optional USB Port Disable at factory (user configurable via BIOS)	X
Removable media write/boot control	X
Power-On password (via BIOS)	X
Administrator password (via BIOS)	X
HP Chassis (1 bay) Security Kit	X
Solenoid Hood Lock / Sensor	N/A
Support for chassis padlocks and cable lock devices	N/A

*Models configured with Intel Core processors have the ability to utilize advanced security protection for online transactions. IPT, used in conjunction with participating web sites, provides double identity authentication by adding a hardware component in addition to the usual user name and password. IPT is initialized through an HP Client Security module.

ENVIRONMENTAL & REGULATORY

ENERGY STAR® qualified models available

EPEAT® registered where applicable/supported. See www.epeat.net for registration status by country.

Low halogen (chassis, all internal components and modules)

TAA compliant

Standard Features and Configurable Components (availability may vary by country)

PORTS

I/O Ports - Standard

USB 2.0	2 (front) 4 (rear)
USB 3.0	2 (front) 2 (rear) 1 (internal)
Serial (RS-232)	1
PS/2	1 keyboard (purple) 1 mouse (green)
Video	1 VGA 1 DVI-D

NOTE-When configured with an Intel Celeron, Pentium or 4th generation Intel Core i3 CPU only two of the available video output ports are active

Audio	Front- headphone/mic Rear-line in/out 3.5mm diameter
RJ-45 Network Interface	1

I/O Ports - Optional

DisplayPort with Multi-Stream support - DP 1.2	1
2nd Serial (RS-232)	1
Parallel	1
PCI Express Mini Card	N/A
MXM Graphics	N/A
mSATA	N/A
PCI Express x1 (v2.0)	3 4.2 full height 6.6 length 10W max. power
PCI Express x16 (v2.0) (wired as a x4)	N/A
PCI Express x16 (v3.0)	1 4.2 full height 6.6 length 75W max. power
Optional PCI (v2.3)	N/A

Standard Features and Configurable Components (availability may vary by country)

BAYS

5.25" external storage drive	1
3.5" external storage drive	1
5.25" ODD	1
Slim ODD	N/A
2.5" internal storage drive	N/A
3.5" internal storage drive	2

SERVICE AND SUPPORT

On-site Warranty¹—One-year (1-1-1) limited warranty delivers one year of on-site, next business day² service for parts and labor and includes free telephone support³ 24 x 7. One-year onsite and labor are not available in all countries. Service offers terms up to 5 years by choosing a Care Pack. To choose the right level of service for your HP product, visit HP Care Pack Central—www.hp.com/go/cpc

NOTE 1—Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.

NOTE 2—On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

NOTE 3—Technical telephone support applies only to HP-configured and third-party HP qualified hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

Technical Specifications – Operating Systems and Software

OPERATING SYSTEMS

Preinstalled	Windows 8.1 Pro (64-bit)*
	Windows 8.1 (64-bit)*
	Windows 7 Ultimate (32-bit)**
	Windows 7 Ultimate (64-bit)**
	Windows 7 Professional (32-bit)**
	Windows 7 Professional (64-bit)**
	Windows 7 Professional (32-bit) (available through downgrade rights from Windows 8.1 Pro)***
	Windows 7 Professional (64-bit) (available through downgrade rights from Windows 8.1 Pro)***
	Windows 7 Home Premium (32-bit)**
	Windows 7 Home Premium (64-bit)**
	Windows 7 Home Basic (32-bit)**
	FreeDOS 2.0
	Novell SUSE Linux Enterprise Desktop 11

For all Preinstalled operating systems HP provides Microsoft WHQL certified (where applicable) drivers on www.hp.com at the time of product announcement.

Web Support	Windows 7 Enterprise (32-bit or 64-bit)
--------------------	---

For all Supported operating systems HP performs testing of the OS, and makes available all HP value add software (OS dependent). Certified drivers are made available on www.hp.com within 30 days of product announcement.

Certified	Novell SUSE Linux Enterprise Desktop 111
	Red Hat Enterprise Linux 64 ¹

For all Certified operating systems HP will submit hardware to the operating system vendor for testing and certification. All drivers would be obtained from the operating system vendor, not supplied by HP. Certification will be posted by the operating system vendor.

*Not all features are available in all editions of Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8.1 functionality. See <http://www.microsoft.com>.

**Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

***This system is preinstalled with Windows® 7 Professional software and also comes with a license and media for Windows 8.1 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

¹The following features are not supported by Novell SUSE Linux Enterprise Desktop²

- Intel Gigabit CT Desktop NIC
- Broadcom NetXtreme Gigabit Ethernet Plus
- HP Media Card Reader
- HP Client Security
- HP Blu-ray Writer playback of commercial movies
- HP 2nd serial port adapter
- Power Management features

Systems configured with Linux do not qualify for ENERGY STAR®

Technical Specifications – Operating Systems and Software

The following features are not supported by Red Hat Enterprise Linux 64⁻

- TPM v1.2 embedded Security Chip
- Intel Gigabit CT Desktop NIC
- HP Wireless 802.11b/g/n NIC
- HP Media Card Reader
- HP Blu-ray Writer
- HP 2nd serial port Adapter
- HP USB Smart Card (CCID) Keyboard
- Power Management features

Systems configured with Linux do not qualify for ENERGY STAR®

SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

Included	Windows 7	Windows 8.1
Security	HP Client Security ⁻ HP Drive Encryption (FIPS 140-2) HP Device Access Manager with Just In Time Authentication HP Password Manager HP File Sanitizer (SSDs and Hybrid Drives not supported) HP Disk Sanitizer External Edition ¹ Microsoft Security Essentials	Disk Sanitizer External Edition ¹ Microsoft Defender
MultiMedia	Cyberlink Power DVD, BD Cyberlink Power2Go (Secure Burn)	Cyberlink Power DVD, BD Cyberlink Power2Go (Secure Burn)
Communication		HP Wireless Hotspot
HP Value Add	HP ePrint Driver ² HP PageLift HP Support Assistant HP Recovery Disk Creator	HP ePrint Driver ² HP PageLift HP Recovery Manager HP Support Assistant
3rd Party	Adobe Flash Player Bing Search for Internet Explorer 10 Box PDF Complete, Corporate Edition Skype	Bing Search PDF Complete, Corporate Edition Skype
Microsoft Products	Buy Office	Buy Office

¹ Available via download.

² Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see www.hp.com/go/eprintcenter). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.

Technical Specifications - Graphics

Intel HD Graphics

VGA Controller	Integrated	
DisplayPort	Multimode capable [†] supports HDCP, Display Port Audio (2 streams), HBR2 link rates and Multi-Stream Technology for a maximum of 2 displays (including the integrated panel)	
Bus Type	N/A	
RAMDAC	N/A	
Memory	Intel graphics do not have dedicated memory but utilizes some of the computer's system memory. The amount of memory used for graphics depending on the amount of system memory installed, BIOS settings, operating system, and system load. 32 MB is pre-allocated for graphics use at system boot time. Additional memory can be allocated at boot time by the BIOS for PAVP (Protected Audio Video Playback) support for playback of protected video content.	
Maximum Graphics Memory	Microsoft Windows 7 Up to 1.7GB	Windows 8.1 Up to 1.8GB
	NOTE —the actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.	
Maximum Color Depth	32 bits/pixel	
Graphics/Video API Support	4th Generation Core processors [†]	

- The Processor Graphics contains a refresh of the seventh generation graphics core enabling substantial gains in performance and lower power consumption. Up to 16 EU support.
- Next Generation Intel Clear Video Technology HD Support is a collection of video playback and enhancement features that improve the end user's viewing experience
 - Encode/transcode HD content
 - Playback of high definition content including Blu-ray Disc
 - Superior image quality with sharper, more colorful images
- DirectX Video Acceleration (DXVA) support for accelerating video processing
 - Full AVC/VC1/MPEG2 HW Decode
- Advanced Scheduler 2.0, 1.0
- Windows 7, Windows 8.1, Linux OS Support
- DirectX 11.1
- OpenGL 4.0
- Open CL 1.2

Supported Display Resolutions and Refresh Rates

NOTE—other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Technical Specifications - Graphics

Resolution	Refresh Rates
800x600	60 Hz
1024x768	60 Hz
1152x864	60 Hz
1280x600	60 Hz
1280x720	60 Hz
1280x800	60 Hz
1280x960	60 Hz
1280x1024	60 Hz
1360x768	60 Hz
1366x768	60 Hz
1400x1050	60 Hz
1440x900	60 Hz
1600x900	60 Hz
1600x1200*	60 Hz
1680x1050	60 Hz
1920x1080	60 Hz
1920x1200*	60 Hz
1920x1440*	60 Hz
2560x1440*	60 Hz
2560x1600*	60 Hz

* Only supported on displays connected to the external DisplayPort connector.

AMD Radeon HD 8470 Graphics Card

Form Factor	Full Height
Graphics Controller	AMD Radeon HD 8470
Core Clock	775MHz
Memory Clock	900MHz
Memory	2GB, DDR3, 64-bit wide
Bus Type	PCIe Gen2
Max. Power	< 30W
Power Source Support	12V and 3.3V
3D API Support	DX11
HDCP Support	Yes
Display Max. Resolution	Digital 2560 x 1600 Analog 2048 x 1536
Supported Graphics APIs	DX11, OpenGL, full 1080p BD (H264) playback in hardware, HDMI 1.4 support

Technical Specifications - Graphics

Supported Display Resolutions and Refresh Rates

NOTE—other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Refresh Rates
800 x 600	60 Hz
1024 x 768	60 Hz
1280 x 720	60 Hz
1280 x 768	60 Hz
1280 x 1024	60 Hz
1360 x 768	60 Hz
1440 x 900	60 Hz
1600 x 900	60 Hz
1680 x 1050	60 Hz
1920 x 1080	60 Hz

NVIDIA NVS 310 Graphics Card

Introduction

The NVIDIA® NVS™ 310 Graphics Card is a PCI Express low profile form factor graphics add-in card targeted as an active low cost graphics solution for the corporate business and enterprise markets.

The NVIDIA® NVS 310 graphics card is an ideal solution for customers requiring a small form factor graphics add-in card for either standard or small form factor PC designs.

Performance and Features

The NVIDIA® NVS 310 Graphics Card offers 512 MB of ultrafast DDR3 memory and is capable of supporting up to 2 displays.

DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HC monitors with optional adapters in kits NR078AA, FH973AT, BP937AA, AS615AA.

For a DisplayPort to DisplayPort connections use the optional DisplayPort Cable Kit VN567AA.

Form Factor

Low Profile=2.713 × 6.15 in

Graphics Controller

NVIDIA® NVS 310

Memory Clock

875MHz

Memory Size

512 MB DDR3

Memory Bandwidth

14 GB/s

Max. Power

19.5W

Display Max. Resolution

Up to 2560 x 1600 (digital display) per display

Display Output

Up to 2 displays in the following configurations

DisplayPort output—

- Drives two DisplayPort enabled digital display at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking, when connected natively using the 2 DisplayPort connectors on the NVS 310 graphics card
- Supports 2 monitors up to resolution of 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort Multi-Stream topology technology.

Technical Specifications - Graphics

- | | |
|---------------------------------|--|
| DVI-D output ² | <ul style="list-style-type: none"> • Drives two digital display at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors • Drives two digital display at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors |
| HDMI output ² | <ul style="list-style-type: none"> • NVS 310 is capable of driving two high definition (HD) panels up to resolutions of 1920 × 1080P at 60 Hz using DisplayPort to HDMI cable adaptors |
| VGA display output ² | <ul style="list-style-type: none"> • Drives two analog display at resolutions up to 1920 × 1200 at 60 Hz using DisplayPort to VGA cable adaptors |

Supported Display Resolutions and Refresh Rates

NOTE—other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rates (Hz) by Connection			
	DisplayPort to VGA	DisplayPort to DVI-D	DisplayPort to HDMI	DisplayPort
640 x 480	85	60	60	60
800 x 600	85	60	60	60
1024 x 768	85	60	60	60
1280 x 720	85	60	60	60
1280 x 1024	85	60	60	60
1440 x 900	75	60	60	60
1600 x 1200	60	60	60	60
1680 x 1050	60	60	60	60
1920 x 1080	60-R	60-R	60	60
1920 x 1200	60-R	60-R		60
1920 x 1440				60
2048 x 1536				60
2560 x 1600				60

Technical Specifications - Graphics

NVIDIA NVS 315 1GB PCIe x 16 Graphics Card

Introduction

Get efficient dual-display graphics performance in a PCI Express low-profile graphics card with the NVIDIA NVS 315 PCIe x16 1 GB Graphics Card, an ideal desktop graphics solution for professional business and commercial applications.

Performance and Features

The NVIDIA® NVS 315 Graphics Card offers 1 GB of ultrafast DDR3 memory and is capable of supporting up to 2 displays.

DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HC monitors with optional adapters in kits NR078AA, FH973AT, BP937AA, AS615AA.

For a DisplayPort to DisplayPort connections use the optional DisplayPort Cable Kit VN567AA.

Form Factor

Low Profile=2.713 × 6.15 in

Graphics Controller

NVIDIA® NVS 315

Memory Clock

875MHz

Memory Size

512 MB DDR3

Memory Bandwidth

14 GB/s

Connectors

DMS-59 , with support for dual VGA, dual DVI or dual Display Port with the appropriate adapter cable

Display Max. Resolution

Up to 2048 x 1536 VGA¹1920 x 1200 DVI²2560 x 1600 DisplayPort

Display Output

Up to 2 displays in the following configurations

- Dual DVI²
 - Drives two DVI displays using optional HP DMS59 DVI Dual-head Connector Cable DL139A
- Dual DisplayPort²
 - Drives two DisplayPort using optional HP DMS-59 to Dual DisplayPort kit XP688AA
- Dual VGA¹
 - Drives two analog using the included HP DMS-59 to Dual VGA Cable

Supported Display Resolutions and Refresh Rates

NOTE—other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rates (Hz) by Connection	
	Analog Connection	Digital Connection
640 x 480	85	60
720 x 480	85	60
720 x 576	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 768	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1024	85	60
1600 x 1200	85	60

Technical Specifications - Graphics

1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A
2560 x 1440	N/A	60*
2560 x 1600	N/A	60*

* Display Port Only

NVIDIA GeForce GT630 Graphics Card

Introduction

The NVIDIA GeForce GT630 DP (2GB) PCIe x16 Card Graphics Card provides a full height, PCI Express x16 graphics add-in card solution based on the NVIDIA Kepler Architecture GPU. The card is designed to support three display connections through its DVII, and two DisplayPort connectors.

An ideal solution for desktop PC customers seeking enhanced 2D and advanced 3D graphics performance, the NVIDIA GeForce GT630 DP (2GB) PCIe x16 Cards are an excellent choice for business users who want run multiple displays from a single graphics board. Engage in Web conferencing or video or photo editing, while improving your everyday business PC experience with better graphics and excellent visual display quality.

Performance and Features

The NVIDIA GeForce GT630 DP (2GB) PCIe x16 Cards deliver superior PCI Express (PCIe) Gen 3 features including-

- Unprecedented flexibility for new applications and enhanced performance
- Support for NVIDIA surround technology
- Run multiple displays from a single graphics card
- Full 16 lane PCIe Generation 3 bus support with peak bandwidth support
- Wireless Display ready for future support

Form Factor

PCIe x16 Card

Graphics Controller

NVIDIA Kepler Architecture GPU

Core Clock

875 MHz

Memory Clock

891 MHz

Memory Size

2 GB DDR3 128 bit

Memory Bandwidth

28.5 GB/s

Display Max. Resolution

2560 x 1600 digital, 2048 x 1536 analog

Display Support

Integrated 400 MHz RAMDAC

Technical Specifications - Graphics

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rates (Hz) by Connection	
	Analog Connection	Digital Connection
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	60
2048 x 1536	75	60
2560 x 1600	N/A	60

AMD Radeon HD 8350 1GB PCIe x16 DH Graphics Card

Introduction	Get stable 2D and advanced 3D graphics performance from the AMD Radeon HD 8350 1 GB PCIe x16 DH Graphics Card, a low profile, PCI Express x16 graphics add-in card based on the AMD Radeon HD 8350 GPU, great for Web conferencing or video and photo editing.
Form Factor	PCIe x16
Graphics Controller	AMD Radeon HD 8350
Core Clock	GPU engine operates at 523 MHz
Memory	1GB, DDR3, SDRAM
Memory Clock	875 MHz
HDCP Support	Yes
Display Max. Resolution	Digital 1920 x 1200 Analog 2048 x 1536

Technical Specifications - Graphics

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

	Analog Connection	Digital Connection
640 x 480	85	60
720 x 480	85	60
720 x 576	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 768	85	60
1280 x 1024	85	60
1440 x 900	75	75
1600 x 1024	85	60
1600 x 1200	85	60
1680 x 1050	75	75-R
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A
2560 x 1440	N/A	N/A
2560 x 1600	N/A	N/A

AMD Radeon HD 8490 1GB PCIe x16 Graphics Card

Introduction	Get impressive graphics and high resolution dual-display performance in a low profile, PCI Express x16 graphics add-in card based on the AMD Radeon HD 8490 Graphics Processor. Improve your everyday PC, Web conferencing, and video or photo editing.
Form Factor	PCIe x16
Graphics Controller	AMD Radeon HD 8490
Core Clock	GPU engine operates at 875 MHz
Memory	1GB, DDR3, SDRAM
Memory Clock	900 MHz
HDCP Support	Yes
Display Max. Resolution	Digital 2560 x 1600 Analog 2048 x 1536

Technical Specifications - Graphics

Supported Display Resolutions and Refresh Rates

NOTE—other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

	Analog Connection	Digital Connection
300 x 200	85	60
320 x 240	85	60
400 x 300	85	60
640 x 480	85	60
720 x 480	85	60
720 x 576	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 768	85	60
1280 x 1024	85	60
1440 x 900	75	75
1600 x 900	85	60
1600 x 1024	85	60
1600 x 1200	85	60
1680 x 1050	75	75-R
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A
2560 x 1440	N/A	60
2560 x 1600	N/A	60

Technical Specifications - Hard Disk and Solid State Storage

Introduction

HP Serial Advanced Technology Attachment (SATA) Hard Drives maximize the performance of HP Business PCs by providing the technologies to meet your increasing storage demands with high-capacity drives offering superior reliability and performance. SATA provides faster data transfer speeds, better system cooling airflow, more bandwidth, more headroom for speed increases in future generations and better data integrity. A next-generation technology, the SATA interface connects hard drives to the PC platform enabling easy aggregation of multiple hard drives into a single PC. This offers you the additional benefits of dedicated bandwidth, the ability to more easily identify device failures and scalability. The HP ProDesk 490 G1 Series Business PC supports the latest SATA 6.0Gb/s specification.

SMART IV Technology

Self Monitoring Analysis and Reporting Technology (SMART) hard drive technology allows hard drives to monitor their own health and to raise flags if imminent failures are predicted. If the drive determines that a failure is imminent, the SMART hard drive technology enables the intelligent manageability or management software to generate a fault alert. While the current versions of SMART hard drives do a good job monitoring the data on the hard drive media, the ever increasing emphasis on reliability and quality has prompted HP to implement SMART IV technology which constantly checks that the data flow from host interface to media and media to host interface is not compromised. This is accomplished by inserting a 2 byte parity code into every 512 byte block in the data path of the hard drive's Cache RAM. This unique parity checking performed by HP's SMART IV technology hard drives, allows for more complete error detection coverage encompassing the entire data path between the host and the hard drive.

Smart IV is also known as IOEDC-I/O Error Detection Code.

Native Command Queuing

NCQ or Native Command Queuing is a SATA protocol extension that allows the hard drive to have several write or read commands outstanding at the same time. In contrast, normal non-queued operation requires each command to be completed before the next command is issued by the host system. Queuing allows the drive to complete the commands in the order that allows for best overall throughput. It also involves an advanced method of transferring data to or from the host, called First Party Direct Memory Access (FPDMA), which allows the hard drive and the host controller to manage the data transfers for multiple outstanding commands, without involving the host processor. NCQ can contribute to better performance but the results are dependent on many factors, including the access patterns of the various applications and operating system functions that are initiating drive accesses. Enabling NCQ features on the hard drive requires AHCI support from the host system BIOS, controller, and driver. AHCI support is typically implemented in RAID configurations.

NOTE—GB = 1 billion bytes. Actual available capacity is less.

Redundant Array of Independent Drives (RAID)

Flexible implementation

- Hard drive information can be viewed within F10 Setup while in RAID mode. Previously, the hard drives will not appear in Drive Configuration when switching to RAID mode.
- DPS Self Test can be executed on physical hard drives while in RAID mode.

NOTE

RAID 1 is the only RAID configuration offered via factory configurations. The pre-configured systems

Technical Specifications - Hard Disk and Solid State Storage

- Are complete RAID systems and have both drives installed. If the MT is configured with three hard disk drives, the third drive is would be un-partitioned and not part of the RAID array
- Have the necessary Option ROM configuration.
- Are pre-loaded and pre-installed with all required Intel software.

Include a preinstalled operating system that is mirrored mode out of the box.

HP 1-TB SATA 6G 2.5 8GB Solid State Hybrid Drive (SSHD)

Formatted Capacity	1 TB
Spindle Speed	5,400 rpm +/- 0.2%
Drive Type	Solid State Hybrid Drive (SSHD) technology with NAND Flash
Interface	Serial ATA (SATA)
Cache Buffer	64 MB
NAND Flash	8 GB
Commercial Multilevel Cell (cMLC)	
Number of Sectors	976,773,168
Seek Time (typical reads)	Single Track ⁻ 2.0 ms Average ⁻ 12 ms
Height	0.374 +/- .008 in (9.5 +/- 0.2 mm)
Width	2.750 +/- 0.010 in (69.85 +/- 0.25 mm)
Length	3.951 +0.008 / -0.010 in (100.35 +0.20 / -0.25 mm)
Weight	0.254 lb/115 g (max)
Operating Temperature	32° to 140° F (0° to 60° C)

HP 500 GB SATA 6G 2.5 8GB Solid State Hybrid Drive (SSHD)

Formatted Capacity	500 GB
Spindle Speed	5,400 rpm +/- 0.2%
Drive Type	Solid State Hybrid Drive (SSHD) technology with NAND Flash
Interface	Serial ATA (SATA)
Cache Buffer	64 MB
NAND Flash	8 GB
Commercial Multilevel Cell (cMLC)	
Number of Sectors	976,773,168
Seek Time (typical reads)	Single Track ⁻ 2.0 ms Average ⁻ 12 ms
Height	0.268 +/- .008 in (6.8 +/- 0.2 mm)
Width	2.750 +/- 0.010 in (69.85 +/- 0.25 mm)
Length	3.951 +0.008 / -0.010 in (100.35 +0.20 / -0.25 mm)
Weight	0.209 lb/95 g (max)
Operating Temperature	32° to 140° F (0° to 60° C)

Technical Specifications - Hard Disk and Solid State Storage

HP 128 GB Solid State Drive

Unformatted Capacity	128 GB*	
Architecture	Multi Level Cell (MLC) NAND	
Interface	SATA 6 GB/sec	
Dimensions (W x H x D)	2.75 x 0.276 x 3.96 in (6.985 x 0.7 x 10.05 cm)	
Weight	0.16 lb (73 g)	
Bandwidth Performance	Sustained Sequential Read ⁻	Up to 450 MB/ss
	Sustained Sequential Write ⁻	Up to 260 MB/s
	Random Read (4KB) ⁻	up to 46K IOPs
	Random Write (4KB) ⁻	up to 56K IOPs
Latency	Read ⁻	55ms (TYP)
	Write ⁻	55ms (TYP)
Power	DC power requirement ⁻	Min 4.5 V ⁺ Max 5.5 V
	Total power consumption ⁻	160 mW (Active) ⁺ <85 mW ⁺ (Idle)
Useful Drive Life	1.2 million device hours**	
Environmental (all conditions, non- condensing)	Operating Temperature ⁻	32° to 158° F (0° to 70° C)
	Relative Humidity (operating) ⁻	5% to 95%
	Shock ⁻	1,500 G/1.0 msec
Regulations	UL, CSA, EN 60950-2000, CISPR Pub 22 Class B, CNS 13438, AS/NZS CISPR 22 ⁻ 2002 Class B, Korea KCC, CE Mark	

* For solid state disk drives, GB means 1 billion bytes. 128GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity will vary by content

** The product achieves a mean time between failure (MTBF) based on population statistics not relevant to individual units.

HP 256 GB SATA 2.5 Self-Encrypting (SED) Solid State Drive

Unformatted Capacity	256,186,209,271 bytes	
Architecture	Self-Encrypting (SED) Solid State Drive with 25nm MLC NAND Flash and SATA interface	
Interface	Serial ATA 2.0 (3.0 Gb/s)	
NAND Flash	25nm MLC NAND Flash	
Height	.275 in/7mm	
Width	2.75 in/69.85 mm	
Length	3.95 in/100.5 mm	
Weight	0.161 lb (73 g)	
Bandwidth Performance	Sustained Sequential 128k Read ⁻	Up to 450 MB/s
	Sustained Sequential 128k Write ⁻	Up to 260 MB/s
	Random 4k Read ⁻	Up to 46K IOPs
	Random 4k Write ⁻	Up to 56K IOPs
Latency	Read ⁻	55 μs
	Write ⁻	55 μs
Power	SATA power consumption ⁻	160 mW (active average) ⁺ <85 mW (idle average)
Useful Drive Life	72TB written, up to 40GB/day for 5 years	



Technical Specifications - Hard Disk and Solid State Storage

Environmental (all conditions, non- condensing)	Operating Temperature ⁻	32° to 158° F (0° to 70° C)
	Relative Humidity (operating) ⁻	5% to 95%
	Shock ⁻	1,500 G/1 ms

HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	1,000,204,886,016 bytes	
Rotational Speed	7,200 rpm	
Interface	Serial ATA 3.0 (6.0 Gb/s)	
Buffer Size	32 MB	
Logical Blocks	1,953,525,168	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track ⁻	2.0 ms
	Average ⁻	11 ms
	Full-Stroke ⁻	21 ms
Height (nominal)	1 in/2.54 cm	
Width (nominal)	Media diameter ⁻	3.5 in/8.89 cm
	Physical size ⁻	4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)	

HP 2-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

Unformatted Capacity	2 TB	
Rotational Speed	7,200 rpm	
Interface	SATA 6Gb/s NCQ	
Cache, Multisegmented (MB)	64 MB	
Seek Time (average)	Read	<8.5 ms
	Write	<9.5 ms
Height	1.028 in/26.11 mm	
Width	4.0 in/101.6 mm	
Depth	5.787 in/146.99 mm	
Weight	1.38 lb/626 g	
Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications - Removable Storage

HP Blu-ray BDXL Writer Drive

Height	5.25-inch, half-height, tray-load		
Orientation	Either horizontal or vertical		
Interface type	SATA		
Disc capacity	Blu-ray=128 GB QL, 100 GB TL, 50 GB DL or 25 GB standard DVD=8.5GB DL or 4.7GB standard		
Dimensions (W x H x D)	5.8 x 1.7 x 7.1 in (14.8 x 4.2 x 18.0 cm) max		
Weight (max)	2.1 lb (950g)		
Performance	CD-ROM Read Access time	Random	140 ms (typical)
		Full Stroke	230 ms (typical)
	DVD-ROM Read Access time	Random	150 ms (typical)
		Full Stroke	240 ms (typical)
	BD-ROM Read Access time	Random	250 ms (typical)
		Full Stroke	350 ms (typical)
	Startup Time	(Time to drive ready from tray loading)	
		BD-ROM (SL/DL)	28S / 28S
		BD-R (SL/DL/TL/QL)	28S / 28S / 40S / 40S
		BD-RE (SL/DL/TL)	28S / 28S / 40S
		DVD-ROM (SL/DL)	18S / 18S
		DVD-R (SL/DL)	25S / 25S
		DVD-RW	25S
		DVD+R (SL/DL)	25S / 25S
		DVD+RW	25S
		DVD-RAM	35S
		CD-ROM	15S
	CD Read speeds	CD-ROM up to 40X	
		CD-R up to 40X	
		CD-RW up to 40X	
	DVD Read speeds	DVD-RAM up to 5X	
		DVD+/-RW up to 10X	
		DVD+/-R up to 16X	
		DVD+/-R DL up to 8X	
		DVD-ROM up to 16X	
		DVD-ROM DL up to 8X	
	Blu-ray Read speeds	BD-ROM (SL/DL) up to 8X	
		BD-R (SL/DL) up to 8X	
		BD-R (TL/QL) up to 6X	

Technical Specifications - Removable Storage

		BD-RE (SL/DL) up to 6X
		BD-RE TL up to 4X
	CD Write speeds	CD-R up to 40X
		CD-RW up to 24X
	DVD Write speeds	DVD+/-R up to 16X
		DVD+/-R DL up to 8X
		DVD+RW up to 8X
		DVD-RW up to 6X
		DVD-RAM up to 5X
	Blu-ray Write speeds	BD-R (SL/DL) up to 6X
		BD-R (TL/QL) up to 4X
		BD-RE (SL/DL/TL) up to 2X
Power	Source	SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
	DC Current	5 VDC -1200 mA typical, 1500 mA maximum 12 VDC -1000 mA typical, 1500 mA maximum
Environmental (all conditions non-condensing)	Temperature (operating)	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 90%
	Maximum Wet Bulb Temperature	86° F (30° C)

HP SuperMulti DVD Writer Drive

Height	5.25-inch, half-height, tray-load	
Orientation	Either horizontal or vertical	
Interface type	SATA	
Dimensions (W x H x D)	5.8 x 1.7 x 6.9 in (14.8 x 4.2 x 17.5 cm) max	
Weight (max)	2.1 lb (950g)	
	CD-ROM Read Access	Random Full Stroke 120 ms typical 200 ms typical
	DVD-ROM Read Access	Random Full Stroke 130 ms typical 240 ms typical
	CD Media Read Transfer	CD-ROM, CD-R Read CD-RW Read Digital/Analog Audio Playback Up to 6000 KB/s (40X) Up to 4800 KB/s (32X) Up to 2400 KB/s (16X)

Technical Specifications - Removable Storage

Digital Audio Extraction (CD-ROM, CD-R) Up to 6000 KB/s (40X)

Digital Audio Extraction (CD-RW) Up to 4800 KB/s (32X)

Video CD Playback Up to 2400 KB/s (16X)

DVD Media Read Transfer DVD-ROM SL Read Up to 21600 KB/s (16X)

DVD-ROM DL Read Up to 10800 KB/s (8X)

DVD Video Playback Up to 10800 KB/s (8X)

DVD Video SL (other than playback) Up to 21600 KB/s (16X)

DVD Video DL (other than playback) Up to 10800 KB/s (8X)

DVD+/-R Up to 21600 KB/s (16X)

DVD+/-R DL Up to 10800 KB/s (8X)

DVD+/-RW Up to 10800 KB/s (8X)

DVD-RAM Up to 6750 KB/s (5X)

CD Media Write Transfer CD-R Up to 6000 KB/s (40X)

CD-RW Up to 600 KB/s (4X)

CD-RW (High speed) Up to 1500 KB/s (10X)

CD-RW (Ultra speed) Up to 3600 KB/s (24X)

DVD Media Write Transfer DVD+/-R Up to 21600 KB/s (16X)

DVD+/-R DL Up to 10800 KB/s (8X)

DVD+RW Up to 10800 KB/s (8X)

DVD-RW Up to 8100 KB/s (6X)

DVD-RAM Up to 6750 KB/s (5X)

Media	Read	Write
CD-ROM	Yes	No
CD-R	Yes	Yes
CD-RW	Yes	Yes
DVD-ROM	Yes	No
DVD-ROM DL	Yes	No
DVD-RAM	Yes	Yes
DVD+/-R	Yes	Yes

Performance

Media Compatibility



Technical Specifications - Removable Storage

	DVD+/-R DL	Yes	Yes
	DVD+/-RW	Yes	Yes
	Source	SATA DC power receptacle	
Power Supply	DC Power Requirement	5 VDC \pm 5%	100 mV ripple p-p
		12 VDC \pm 5%	200 mV ripple p-p
	DC Current	5 VDC	1000 mA (typical) 1600 mA (max.)
		12 VDC	1200 mA (typical) 2000 mA (max.)
		Total Drive Power (Standby Mode)	< 2.5W
Rear Panel	SATA Power Connector, 15-pin		
	SATA Data Connector, 7-pin		
	Markings to identify each connector		
Environmental conditions (all conditions non-condensing)	Operating Temperature	41° to 122° F (5° to 50° C)	
	Storage Temperature	-22° F to 140° F (-30° C to 60° C)	
	Relative Humidity	10% to 90%	
	Maximum Wet Bulb Temperature	86° F (30° C)	
HP DVD-ROM Drive			
Height	5.25-inch, half-height, tray-load		
Orientation	Either horizontal or vertical		
Interface type	SATA		
Dimensions (W x H x D)	5.8 x 1.7 x 6.9 in (14.8 x 4.2 x 17.5 cm) max		
Weight (max)	2.1 lb (950 kg)		
Performance	CD-ROM Read Access time	Random	120 ms typical
		Full Stroke	200 ms typical
	DVD-ROM Read Access time	Random	130 ms typical
		Full Stroke	240 ms typical
	CD Media Read Transfer	CD-ROM, CD-R Read	Up to 6000 KB/s (40X)
		CD-RW Read	Up to 4800 KB/s (32X)
		Digital/Analog Audio Playback	Up to 2400 KB/s (16X)
		Digital Audio Extraction (CD-ROM, CD-R)	Up to 6000 KB/s (40X)

Technical Specifications - Removable Storage

		Digital Audio Extraction (CD-RW)	Up to 4800 KB/s (32X)
		Video CD Playback	Up to 2400 KB/s (16X)
	DVD Media Read Transfer	DVD-ROM SL Read	Up to 21600 KB/s (16X)
		DVD-ROM DL Read	Up to 10800 KB/s (8X)
		DVD Video Playback	Up to 10800 KB/s (8X)
		DVD Video SL (other than playback)	Up to 21600 KB/s (16X)
		DVD Video DL (other than playback)	Up to 10800 KB/s (8X)
		DVD+/-R	Up to 21600 KB/s (16X)
		DVD+/-R DL	Up to 10800 KB/s (8X)
		DVD+/-RW	Up to 10800 KB/s (8X)
		DVD-RAM	Up to 6750 KB/s (5X)
Media Compatibility	Media	Read	Write
	CD-ROM	Yes	No
	CD-R	Yes	No
	CD-RW	Yes	No
	DVD-ROM	Yes	No
	DVD-ROM DL	Yes	No
	DVD-RAM	Yes	No
	DVD+/-R	Yes	No
	DVD+/-R DL	Yes	No
	DVD+/-RW	Yes	No
Power Supply	Source	SATA DC power receptacle	
	DC Power Requirement	5 VDC \pm 5%	100 mV ripple p-p
		12 VDC \pm 5%	200 mV ripple p-p
	DC Current	5 VDC	1000 mA (typical) 1600 mA (max.)
		12 VDC	1200 mA (typical) 2000 mA (max.)
		Total Drive Power (Standby Mode)	< 2.5W
Rear Panel	SATA Power Connector, 15-pin		
	SATA Data Connector, 7-pin		
	Markings to identify each connector		
Environmental conditions (all conditions non-condensing)	Operating Temperature	41° to 122° F (5° to 50° C)	
	Storage Temperature	-22° F to 140° F (-30° C to 60° C)	
	Relative Humidity	10% to 90%	
	Maximum Wet Bulb Temperature	86° F (30° C)	

Technical Specifications – Memory

System Memory Support

The HP ProDesk 490 G1 Business PC supports the 4th generation Intel® Core™ processor family. Based on a new PC micro-architecture, the processor is designed for a two-chip platform consisting of a processor and Platform Controller Hub (PCH). Unlike previous generations, the 4th generation Intel® Core™ processor includes an Integrated Memory Controller (IMC). The IMC supports DDR3/DDR3L protocols with two independent, 64-bit wide channels each accessing one or two DIMMs.

- Two channels of non-ECC DDR3/DDR3L unbuffered dual in-line memory modules (UDIMM) or DDR3/DDR3L unbuffered small outline dual in-line memory modules (SO-DIMM) with a maximum of two DIMMs per channel
- Single-channel and dual-channel memory organization modes
- Data burst length of eight for all memory organization modes
- Memory data transfer rates of up to 1600 MT/s¹ actual supported data transfer rate determined by the configured processor.
- 64-bit wide channels
- DDR3/DDR3L system memory I/O voltage of 1.5V
- Theoretical maximum memory bandwidth of²
 - 21.3 GB/s in dual-channel mode assuming 1333 MT/s
 - 25.6 GB/s in dual-channel mode assuming 1600 MT/s

Platform Memory Support

- The Microtower platform supports up to four (4) industry-standard DDR3-SDRAM DIMMs.

CAUTION—You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

NOTE—For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Technical Specifications - Networking and Communications

Realtek RTL8151GH-CG GbE LOM Network Adapter

Connector	RJ-45
System Interface	Integrated on PCA
Controller	Realtek RTL8151GH-CG Gigabit Ethernet Controller
Memory	16 KB FIFO packet buffer memory
Data rates supported	10/100/1000 Mbps 802.1P 802.1Q 802.3 802.3ab 802.3az 802.3u
IEEE Compliance	
Bus architecture	PCI Express
Data transfer mode	PCIe-based interface for active state operation (S0 state)
Power requirement	Requires 3.3V and 1V or just 3.3V with integrated regulators Power consumption 0.425 W
Network transfer mode	Full-duplex Half-duplex (not supported for the 1000BASE-T transceiver)
Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
Environmental	Operating Temperature -32° to 158° F (0° to 70° C) Operating Humidity 5-60% RH
Management	WOL, auto MDI crossover, PXE, Multi-port teaming, Advanced cable diagnostic

Intel® Ethernet I210-T1 Gigabit Network Adapter

Connector	RJ-45
System Interface	PCI Express x1
Controller	Intel® I210 Gigabit Ethernet Controller
Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
Data rates supported	10/100/1000 Mbps
IEEE Compliance	802.1P 802.1Q 802.2 802.3 802.3AB 802.3u 802.3x flow control
Bus architecture	PCI-E 2.1

Technical Specifications - Networking and Communications

Data path width	X1, 250 MB/s, Bi-directional interface
Data transfer mode	Bus-master DMA
Hardware certifications	FCC, B, CE, TUV-c, TUVus Mark Canada and United States, TUV-GS Mark for European Union
Power requirement	Aux 3.3 V, 3.0 Watts in 1000 base-T and 1.0 Watts in 100 Base-T
Boot ROM support	Yes
	10BASE-T (half-duplex) 10 Mbps
	10BASE-T (full-duplex) 20 Mbps
Network Transfer Rate	100BASE-TX (half-duplex) 100 Mbps
	100BASE-TX (full-duplex) 200 Mbps
	1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)
Environmental	Operating Temperature -32° to 131°F (0° to 55° C)
	Operating Humidity 85% at 131° F (55° C)
Management	WOL, PXE, DMI, WFM 2.0

Intel Dual Band Wireless-N 7260 802.11 a/b/g/n (2x2) Wireless Network Interface Connection

Wireless LAN Standards	IEEE 802.11a/b/g/n	
Interoperability	Wi-Fi certified (802.11 a/b/g/n WMM, WPA, WPA2 and WPS) Cisco Compatible Extensions Program compliant with Microsoft Windows 7, Windows Vista and XP. NOTE=WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.	
Frequency Band	802.11b/g/n	2.402-2.482 GHz
	802.11a/n	4.9 - 4.95 GHz (Japan) 5.15 - 5.25 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.825 - 5.850 GHz
Antenna Structure	2 transmit/2 receive (2x2)	
Data Rates	802.11a=6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b=1, 2, 5.5, 11 Mbps 802.11g=6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n=MCS 0 ~ MCS 15, (20MHz, and 40MHz)	
Modulation	Direct Sequence Spread Spectrum CCK, BPSK, QPSK, 16-QAM, 64-QAM	
Security	<ul style="list-style-type: none"> • IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP=128 bit in hardware • 802.1x authentication • WPA, WPA2=802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • IEEE 802.11i • Cisco Certified Extensions, all versions through CCX4 and CCX Lite • 	

Technical Specifications - Networking and Communications

	<ul style="list-style-type: none"> • WAPI
	Note=Check latest software/driver release for updates on supported security features.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between band Access Points
Output Power	<ul style="list-style-type: none"> • 2.4G=+13.5dBm minimum • 5G=+12dBm minimum
	Note=Maximum output power may vary by country according to local regulations.
Power Consumption	Transmit=2.0 Watts Receive=1.6 Watts Idle mode=250 mW (WLAN associated) In Power Save Polling mode and on battery power. Idle mode=100 mW (WLAN unassociated) Radio off=100 mW (WLAN unassociated)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity	802.11g=90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps)
Note=Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).	802.11b=95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBm (11 Mbps)
	802.11g=90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps)
Antenna Connections	2 U.FL type connectors (output impedance of 50 ± 2 ohms)
Form Factors	PCI-Express Half-MiniCard
Weight	0.0068 lb (3.1 g)
Dimensions	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)
Operating Voltage	3.3V +/- 9%
Temperature	Operating= 14° to 158° F (-10° to 70° C) Non-operating= -40° to 176° F (-40° to 80° C)
Humidity	Operating= 10% to 90% (non-condensing) Non-operating= 5% to 90% (non-condensing)
LED Activity	LED Amber - Radio OFF=LED White - Radio ON

Technical Specifications - Audio

High Definition Audio

Type	Integrated
HD Stereo Codec	Realtek 2-channel ALC221 codec
Audio I/O Ports	Front microphone-In (150-K ohm Input Impedance) Rear Line-In/Microphone input (150-K ohm Input Impedance, function is configurable by audio driver) Rear Line-Out* (190 ohms Output Impedance, expects at least a 10-K ohm load) Front Headphone-Out (0.5 Ohm Output Impedance, expects at least a 32 ohm load) Front Microphone/Headphone jack is re-task able to provide Microphone input, line-in or Headphone output to support connecting two headphones to the front of the system. When configured as a second front headphone output, both front headphone outputs are always driven with the same signal. All ports are 3.5mm
Internal Speaker Amplifier	1.5W amplifier for the internal speaker only. External speakers must be powered externally. Rear Line-in audio port is re-taskable as either Line-in or Microphone-In.
Multi-streaming Capable	Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks.
Sampling	8 kHz - 192 kHz
Wavetable Syntheses	Yes – Uses OS soft wavetable
Analog Audio	Yes
# of Channels on Line-Out	Stereo (Left & Right channels)
Internal Speaker	Yes
External Speaker Jack	Yes

Technical Specifications – Keyboards and Pointing Devices

HP USB Keyboard

	Keys	104, 105, 106, 107, 109 layout (depending upon country)
Physical characteristics	Dimensions (L x W x H)	18.12 x 6.47 x 0.96 in (46.03 x 16.43 x 2.44 cm)
	Weight	2 lb (0.9 kg)
	Operating voltage	+ 5VDC ± 5%
	Power consumption	50-mA maximum (with three LEDs ON)
Electrical	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC 99 - 2001	Functionally compliant
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
Mechanical	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
Environmental	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	30 in (76.2 cm) on concrete, 16-drop sequence
Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
Ergonomic compliance	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, KC	

Technical Specifications – Keyboards and Pointing Devices

Kit contents	Keyboard	Installation Guide
	Warranty Card	Safety and Comfort Guide
HP PS/2 Keyboard		
Physical Characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Dimensions (L x W x H)	18.22 x 6.47 x 1.1 in (46.28 x 16.43 x 2.79 cm)
	Weight	2 lb (0.9 kg) minimum
Electrical	Operating voltage	+ 5VDC ± 5%
	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	PS/2 6-pin mini din connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
	Keycaps	Low-profile design
Mechanical	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	50-dBA maximum sound pressure level
	Operating temperature	32° to 104° F (0° to 40° C)
	Non-operating temperature	-22° to 149° F (-30° to 65° C)
	Operating humidity	15% to 80% (non-condensing at ambient)
Non-operating humidity	15% to 90% (non-condensing at ambient)	
Environmental	Operating shock	N/A
	Non-operating shock	65 inch 2.9 ms, six surface±30g 266 inch/second±50g 266 inch/second six surface
	Operating vibration	2-g peak acceleration
	Non-operating vibration	Starting at 5 Hz, vary the frequency of vibration from 5 to 500 Hz and back to 5 Hz at a Logarithmic sweep rate of 1 octave per minute.

Technical Specifications – Keyboards and Pointing Devices

Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
Drop (in box)	29.93 in (76 cm) on concrete, 16-drop sequence

Approvals CUL, ICES-003 Class B, FCC, CE Mark, TUV GS, VCCI, BSMI, C-Tick, KC

Ergonomic compliance ANSI HFS 100, ISO 9241-4, and TUVGS

HP USB Smart Card (CCID) Keyboard

Key Benefits

- Protects against unauthorized access with smart card technology
- Delivers even greater security when combined with a HP ProtectTools smart card and the HP ProtectTools Security Software
- Combination of username and password or pin with a smart card or security token
- Secures online transactions using digital signatures and certificates
- Conforms to industry standards for ease of setup and use
- Delivers long product life and quiet operation with high-impact materials and lubricated keys
- Spill drain feature

Physical Characteristics

Keys	104, 105, 106, 107, 109 layout (depending upon country)
Form factor	USB basic smart card keyboard
Colors	Carbonite/Silver
Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)
Weight	2 lb (0.9 kg) minimum
Operating voltage	+ 5VDC ± 5%
Power consumption	100-mA maximum (with four LEDs ON)

Electrical

System interface	USB Type A plug connector
ESD	CE level 4, 15-kV air discharge
EMI - RFI	Conforms to FCC rules for a Class B computing device
Microsoft PC 99 - 2001	Functionally compliant
Languages	30+ available

Mechanical

Keycaps	Standard design
Switch actuation	55 g nominal peak force with tactile feedback
Switch life	20 million keystrokes (using Hasco modified tester)
Switch type	Contamination-resistant membrane
Key-leveling mechanisms	For all double-wide and greater-length keys
Cable length	6 ft (1.8 m)
Microsoft PC 99 - 2001	Mechanically compliant
Acoustics	43-dBA maximum sound pressure level
Operating temperature	50° to 122° F (10° to 50° C)
Non-operating temperature	-22° to 140° F (-30° to 60° C)
Operating humidity	10% to 90% (non-condensing at ambient)

Technical Specifications – Keyboards and Pointing Devices

Environmental	Non-operating humidity	20% to 80% (non-condensing at ambient)		
	Operating shock	40 g, six surfaces		
	Non-operating shock	80 g, six surfaces		
	Operating vibration	2-g peak acceleration		
	Non-operating vibration	4-g peak acceleration		
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence		
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence		
	Support	All ISO 7816 smart cards		
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)		
	Chipset	SCM STCIII		
Standard APIs supported	PC/SC, EMV2000, CT-API			
SmartCard Function	Power	USB Port		
		Short circuit detection (protects smart card and reader)		
		Power supply compliant with ISO7816 and EMV (5V, 60 mA)		
		Supports 3-V and 5-V cards		
	Power consumption	100-mA maximum draw		
	Communication	From card	9600 bps to 330,000 bps	
		From computer	12 Mbps (USB transfer speed)	
	Landing mechanism	Contact device	Friction contact	
		Card insertions rating	Up to 100,000 insertion cycles	
	Interface modes	CCID protocol		
Reader performance interface	USB connection			
Electro-magnetic standards	Europe	2004/108/EC		
	USA	USAFCC part 15		
Approvals	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, EMV2000, USB-IF			
Ergonomic Compliance	ISO 9241-4, TUVGS			
Kit Contents	Keyboard, I/O Security and Documentation CD, warranty card			

HP USB PS/2 Washable Keyboard

Physical Characteristics	Keys	104 (US) layout or 105 (EU) layout – depending upon country	
	Dimensions (L x W x H)	17.67x 6.62 x 1.38 in (449 x 168 x 35 mm)	
	Weight	1.7 lb (0.77 kg) minimum	
	Operating voltage	+ 5VDC ±5%	
	Power consumption	50-mA maximum (with three LEDs ON)	

Technical Specifications – Keyboards and Pointing Devices

Electrical	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC 99 - 2001	Functionally compliant
	Keycaps	Stepped -profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes
Mechanical	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	7 ft (2.2 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
Environmental	Operating humidity	10% to 95% (non-condensing at ambient)
	Non-operating humidity	0% to 95% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	
Operating system support	Windows® 7, Windows Vista, Windows XP Professional	
Approvals	UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1, IP66/NEMA4X	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

HP Wireless Keyboard and Mouse

Keyboard	Dimensions (H x L x W)	1.09 x 18.1 x 6.47 in (27.87 x 460.3 x 164.3 mm)
	Weight – Without Two AA Alkaline Batteries	1.94 lb (880 g)

Technical Specifications – Keyboards and Pointing Devices

Mouse	Dimensions (H x L x W)	1.46 x 4.53 x 2.47 in (37 x 115 x 62.9 mm)
	Weight – Without Two AA Alkaline Batteries	0.15 lb (67 g)
Receiver	Dimensions (H x L x W)	0.33 x 1.79 x 0.72 in (8.4 x 45.5 x 18.4 mm)
	Weight	0.21 oz (5.9 g)
	Cable Length – Minimum	6 ft (1.8 m)
System Requirements	Range	32.8 ft (10 m)
	Windows 7 Home Basic*, Windows 7 Home Premium*, Windows 7 Professional Edition 32*, Windows 7 Professional Edition 64*, Windows 7 Ultimate Edition 32*, Windows 7 Ultimate Edition 64* Windows Vista or Windows XP	
	Available USB port for the receiver	
	CD-ROM Drive	

*This system may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

Approvals	Product Safety	UL [†] CSA /TUV (Europe only) [‡] CE Mark [‡] CB Report
	Ergonomics	ANSI [†] ISO (Europe only) [‡] GS Mark (Germany only)
	EMC	FCC [‡] CE [‡] ACA (-tick) [‡] BSMI [‡] KC [‡] VCCI
	CE Mark	EN 55022-2010 [‡] EN 55024 [‡] EN 301489-1 [‡] EN 61000
	Design Guidelines for PCs	PC 99 - connector overmold colors [‡] PC 2001 - full functionality
	Telecom	All local telecom requirements and approvals for intended markets
	USA	FCC Title 47 CFR, Par 15, Subpart C [‡] other local requirements
	Country Support	US, Belgium, Switzerland, Spain, Denmark, Netherlands, France, Germany, Italy, Portugal, Sweden, Norway, Finland, UK, Poland, Czech Republic, Turkey, Greece, Austria, Bulgaria, Cyprus, Estonia, Hungary, Ireland, Latvia, Lithuania, Luxemburg, Malta, Romania, Slovakia, Slovenia, Vietnam, HK, Australia, NZ, Malaysia, Singapore, Indonesia, Philippines, Thailand, Canada, China, Japan, Korea, Taiwan, India, Venezuela, Ecuador, Russia, Ukraine, Israel, Croatia, United Arab Emirates, Peru, Brazil, Chile, Argentina, Mexico, South Africa, and up to 193 countries worldwide.

HP PS/2 Mouse

Dimensions (H x L x W)	1.46 x 2.48 x 4.53 in (3.70 x 6.29 x 11.50 cm)
Weight	3.53 oz (100g [‡] +10g/- 5 g)



Technical Specifications – Keyboards and Pointing Devices

	Operating temperature	-32° to 104°F (0° to 40° C)
	Non-operating temperature	-4° to 140°F (-20° to 60° C)
	Operating humidity	10% to 90% (non condensing at ambient)
	Non-operating humidity	10% to 90% (non condensing at ambient)
Environmental	Operating shock	40 g, 6 surfaces
	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration
	Non-operating vibration	4 g peak acceleration
	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
	Operating voltage	5 VDC ± 10%
	Power consumption	100mA
Electrical	System consumption	PS/2 mini-din connector
	ESD	CE level 4, 15 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC99 - 2001	Functionally compliant
	Resolution	800 DPI
	Tracking speed	10 in/s (25.4 cm/s) maximum
	Acceleration	±15%
	Switch actuation	65±20 gf
Mechanical	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches
	Tracking mechanism life	80 km
	Cable length	6 ft (1.8 m)
	Microsoft PC99 - 2001	Mechanically compliant
	Width	6 mm
	Diameter	22.5 ± 0.2 mm
Scroll wheel	Maximum rotation force	50 gf-cm
	Switch type	Light force micro-switch
	Switch life	1 million operations
	Mechanical life	Minimum 200,000 revolutions

Technical Specifications – Keyboards and Pointing Devices

Regulatory Approvals UL/cUL, FCC, CE Mark, TUV/GS, VCCI, KCC, BSMI, C-Tick

HP USB Mouse

Dimensions
(H x L x W) 1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)

Weight 0.22 lb (0.10 kg)

Cable length 70.9 in (180 cm)

System requirements Available USB port

HP USB 1000dpi Laser Mouse

Dimensions
(H x L x W) 1.47 x 4.53 x 2.47 in (37.3 x 114.97 x 62.86 mm)

Weight 3.360 oz (102g)

Cable length 70.9 in (180 cm)

System requirements Available USB port

Environmental

Operating Temperature	32° to 104° F (0° to 40° C)
Non-operating Temperature	-4° to 140° F (-20° to 60° C)
Operating Humidity	10% to 90% (non-condensing at ambient)

Mechanical

Resolution	1000dpi
Tracking Speed	45 cm/sec
Cable Length	70.9 in (180 cm)

Technical Specifications – Keyboards and Pointing Devices

HP USB PS/2 Washable Mouse

Dimensions (H x L x W)	1.56 x 2.44 x 4.61 in (3.95 x 6.21 x 11.7 cm)	
Weight	4.44 oz (126 g)	
Environmental	Operating temperature	-32° to 104°F (0° to 40° C)
	Non-operating temperature	-4° to 140°F (-20° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	10% to 90% non-condensing
Environmental	Operating shock	40 g, 6 surfaces
	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration
	Non-operating vibration	4 g peak acceleration
Electrical	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
	Operating voltage	5 VDC ± 10%
	Power consumption	100mA
	System consumption	PS/2 mini-din connector or USB
	ESD	CE level 2 8 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC99 – 2001	Functionally compliant
	Resolution	1000 ± 20% DPI
	Tracking speed	14 in/s (35.56 cm/s) maximum
	Acceleration	2 g
Mechanical	Switch actuation	70 g nominal peak force
	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches
	Cable length	8.8 ft total 70 cm+ 2m extension
	Microsoft PC99 – 2001	Mechanically compliant
	Width	6 mm
Scroll wheel	Diameter	1 in (25.4 mm)
	Maximum rotation speed	48 rats/sec
	Switch type	Light force micro-switch
	Switch life	3 million operations
Regulatory approvals	Mechanical life	Minimum 200,000 revolutions
	Compliant	FCC, CE Mark, ICES-003-B, IP66/NEMA4X

Technical Specifications – Power

Unit Environment and Operating Conditions

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure and the same operating guidelines listed above will still apply.

Temperature Range	Operating—50° to 95° F (10° to 35° C)* Non-operating—–22° to 140° F(–30° to 60° C)
Relative Humidity	Operating—10% to 90% (non-condensing at ambient) Non-operating—5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating—10,000 ft (3048 m) Non-operating—30,000 ft (9144 m)

*Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

Power Supply

Standard Efficiency	300W active PFC (230 VAC input only)
High Efficiency* 80 PLUS Bronze	300W active PFC 82/85/82% efficient at 20/50/100% load (115V) 82/85/82% efficient at 20/50/100% load (230V)
Operating Voltage Range	90 - 264 VAC
Rated Voltage Range	200 - 240 VAC (300W active PFC) 90 - 240 VAC
Rated Line Frequency	50/60 Hz
Operating Line Frequency Range	47 - 63 Hz
Rated Input Current	4A
Rated Input Current with Energy Efficient* Power Supply	4A
Current Leakage (NFPA 99)	<900uA / 230Vac (300W PSU)
Power Supply Fan	80mm Fan (300W PSU)
Power cord length	6.0 ft. (1.83 m)
External Power Adapter	

Technical Specifications – Power

Dimensions	N/A
Total Cord Length	N/A

*High efficiency power supply is a requirement for ENERGY STAR® qualification in conjunction with a select range of processors and modules

Technical Specifications – Weights & Dimensions

Weights & Dimensions

(configured with 1 HDD & 1 ODD)

Chassis (W x H x D)	182.88 x 357 x 402 mm 7.2 x 14.05 x 15.82 in
System Volume	24.66 L
System Weight*	7.148 kg 15.75 lb
Max Supported Weight (desktop orientation)	N/A
Tower Stand (H x W x D)	N/A
Packaged (H x W x D)	535 x 289 x 500 mm 21.06 x 11.37 x 19.68 in
Shipping Weight*	Est. = ~10.7 kg (packaged) ~23.58 lb
Palletization Profile	4-units per layer 8-layer max. 32-units per pallet

Technical Specifications – Miscellaneous Features

Management Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- Intel Wired for Management support—industry wide initiative to make Intel architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button—acts as both an on/off button and a suspend-to-sleep button

Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table—
 - Number of 1-second red LED blinks followed by a 2-second pause, then repeats—
 - 2 - processor thermal protection activated
 - 3 - processor not installed
 - 4 - power supply failure
 - 5 -- memory error
 - 6 - video error
 - 7 - PCA failure (ROM detected failure prior to video)
 - 8 - invalid ROM, bootblock recovery mode
 - 9 - system not fetching code
 - 10 - system hang while loading an option ROM
- HP PC Hardware Diagnostics UEFI—
 - This utility enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing F2 at POST, and is available as a download from HP Support
- System/Emergency ROM
- Flash ROM
- CMOS Battery Holder for easy replacement
- Flash Recovery with Video Configuration Record Software
- 5 Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)
- Clear Password Jumper
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions
- Color coordinated cables and connector
- Tool-less Hood Removal
- Front power switch
- System memory can be upgraded without removing the system board or any internal components
- Tool-less Hard Drive, CD & Diskette Removal
- Green Pull Tabs, and Quick Release Latches for easy Identification

Technical Specifications – Miscellaneous Features

Additional Features

	Description
Towerable Orientation	Product can be oriented as either a desktop (horizontal) or a tower (vertical)
Drive Lock	Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided.
Drive Protection System	<p>DPS Access through F10 Setup during Boot</p> <p>A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user</p> <p>Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced</p>
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures
SMART I - Drive Failure Prediction	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted
SMART I - Drive Failure Prediction	Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count
SMART II - Off-Line Data Collection	By avoiding actual hard drive failures, SMART hard drives act as insurance against unplanned user downtime and potential data loss from hard drive failure
SMART III - Off-Line Read Scanning with Defect Reallocation	<p>IOEDC-I/O Error Detection Circuitry</p> <p>Detects errors in Read/Write buffers on HDD cache RAM</p>
SMART IV - End-to-End CRC for hard drives	Interface in F10 setup provides confirmation of SMART IV support.

Options and Accessories (sold separately)

Communication Devices

	Part Number
Intel Ethernet I210 - T1 Gbe NIC	E0X95AA
Intel 6205 802.11 a/b/g/n PCIe x1 NIC	E0X93AA

NOTE= The use of any of these optional NIC Cards (wired or wireless) will disable the Intel vPro Technology features.

Graphics Solutions

	Part Number
AMD Radeon HD 8350 Graphics (PCIe x16)	E1C63AA
AMD Radeon HD 8490 Graphics Card	E1C64AA
Nvidia NVS 310 Graphics (PCIe x16)	A7U59AA
Nvidia NVS 315 Graphics (PCIe x16)	E1C65AA
HP DisplayPort Cable Kit	VN567AA
HP DisplayPort To Dual Link DVI-D Adapter	NR078AA
HP DisplayPort To DVI-D Adapter	FH973AA
HP DisplayPort to HDMI Adapter	BP937AA
HP DisplayPort to VGA Adapter	AS615AA
HP DMS-59 to Dual DVI Cable	DL139A
HP DMS-59 to Dual DisplayPort Adapter	XP688AA

Data Storage Drives and Accessories

	Part Number
HP 2TB 7200rpm SATA 6.0Gb/s Hard Disk Drive	
HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5~Hard Disk Drive	QK555AA
HP 1-TB 10K rpm SATA 6.0Gb/s 3.5~Hard Disk Drive	C2T91AA
HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5~Hard Disk Drive	QK554AA
HP 128-GB SATA 3.0Gb/s Solid State Drive	QV063AA
HP 160-GB SATA 3.0Gb/s Solid State Drive	QV064AA*
HP 500-GB SATA 3.0Gb/s Solid State Hybrid Drive	E1C62AA
HP Slim Removable SATA Hard Drive Enclosure (frame & carrier)	C1N41AA
HP Slim Removable SATA Hard Drive Enclosure (carrier only)	E3F39AA
HP Chassis (1bay) Security Kit	AR639AA

*Not available in all regions.

Options and Accessories (sold separately)

Input Devices

	Part Number
HP USB Keyboard	QY776AA
HP USB Gray Keyboard	B6B64AA
HP USB Smart Card (CCID) Keyboard	BV813AA
HP USB Keyboard and Mouse Kit	B1T09AA
HP USB Washable Keyboard	VF097AA
HP USB and PS/2 Washable Mouse	BM866AA
HP USB and PS/2 Washable Keyboard and Mouse Kit	BU207AA
HP PS/2 Mouse	QY775AA
HP USB Mouse	QY777AA
HP USB 1000dpi Laser Mouse	QY778AA
HP Wireless Keyboard and Mouse Combination	QY449AA

System Memory

	Part Number
HP 4GB DDR3-1600 (PC3-12800) DIMM	B4U36AA
HP 8GB DDR3-1600 (PC3-12800) DIMM	B4U37AA

Multimedia Devices

	Part Number
HP Slim DVD-ROM Drive	VP033AA
HP Slim SuperMulti DVD Writer Drive	QS209AA
HP USB HD 720P v2 Business Webcam	D8Z08AA
HP Business Headset	QK550AA

Removable Media Storage

	Part Number
HP 14-in-1 Media Card Reader (available Dec. 2013)	TBD

Security Devices

	Part Number
HP SFF Wall Mount/Security Sleeve	VN570AA
HP UltraSlim Cable Lock	H4D73AA

Options and Accessories (sold separately)

Stands and Accessories

	Part Number
HP Integrated Work Center Stand (SFF)	QP897AA
HP SFF Tower Stand	VN569AA
HP 490 Tower Bezel Kit	E1C66AA
HP 490 SFF Bezel Kit	E3F27AA
HP Serial Port Adapter (RS-232 compatible)	PA716A
HP Parallel Port Kit	KD061AA
HP PCI Expansion Kit	E1V16AA

Business Monitors

	Part Number
HP ProDisplay P191	C9E54AA
HP ProDisplay P201	C9F26AA
HP ProDisplay P221	C9E49AA
HP EliteDisplay E201	C9V73AA
HP EliteDisplay E221	C9V76AA
HP EliteDisplay E231	C9V75AA
HP LA2405x	D0P36AA
HP EliteDisplay E271i	D7Z72AA
HP EliteDisplay E221c	D9E49AA
HP L2206tm	B0L55AA

LANDesk Software (E-Delivery)

Contact your HP representative for available options.

© Copyright 2013 Hewlett-Packard Development Company, L.P. All rights reserved.

The information contained herein is subject to change without notice and is provided ~~as is~~ without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft, Windows and Windows 7 are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel and Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.