


OVERVIEW

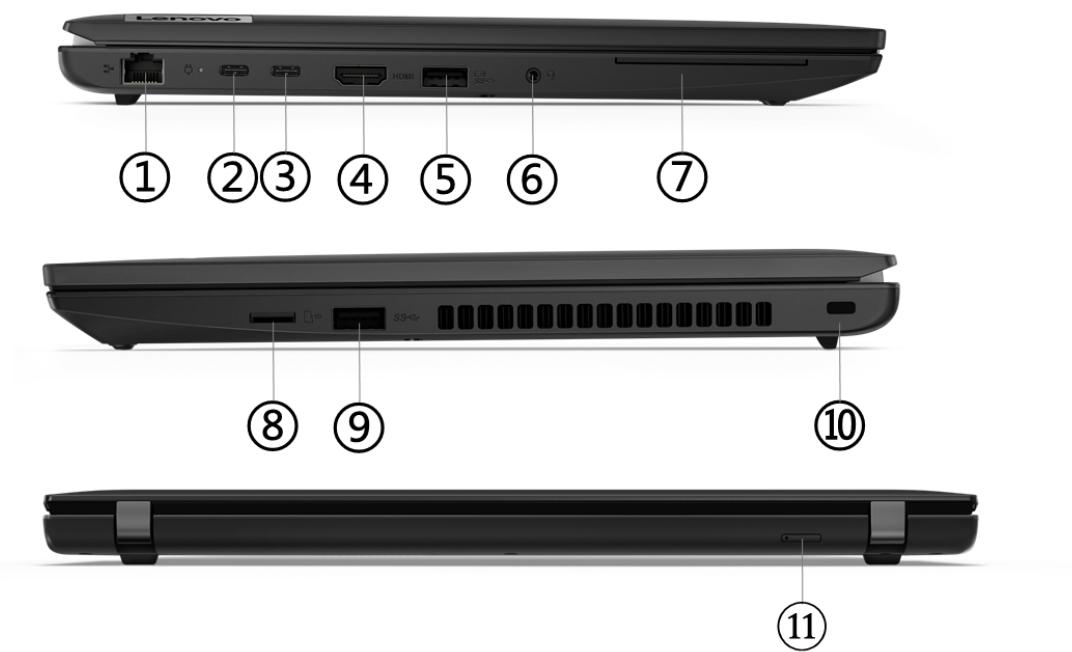

1. Ethernet (RJ-45)	7. Smart card reader *
2. USB-C 3.2 Gen 1	8. microSD card reader
3. Thunderbolt 4	9. USB 3.2 Gen 1
4. HDMI	10. Kensington Nano Security Slot
5. USB 3.2 Gen 1 (Always On)	11. Nano-SIM card slot *
6. Headphone / microphone combo jack (3.5mm)	

- Notes:
- Items with \* are only available on selected models

PERFORMANCE

Processor

Processor Family

Intel® Pentium® or 12th Generation Intel Core™ i3 / i5 / i7 Processor

Processor\*\*[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Pentium Gold 8505	5 (1 P-core + 4 E-core)	6	P-core 1.2GHz / E-core 0.9GHz	P-core 4.4GHz / E-core 3.3GHz	8MB	Intel UHD Graphics
Core i3-1215U	6 (2 P-core + 4 E-core)	8	P-core 1.2GHz / E-core 0.9GHz	P-core 4.4GHz / E-core 3.3GHz	10MB	Intel UHD Graphics
Core i5-1235U	10 (2 P-core + 8 E-core)	12	P-core 1.3GHz / E-core 0.9GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	Intel Iris® Xe Graphics[2]
Core i5-1240P	12 (4 P-core + 8 E-core)	16	P-core 1.7GHz / E-core 1.2GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	Intel Iris Xe Graphics[3]
Core i5-1245U	10 (2 P-core + 8 E-core)	12	P-core 1.6GHz / E-core 1.2GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	Intel Iris Xe Graphics[4]
Core i5-1250P	12 (4 P-core + 8 E-core)	16	P-core 1.7GHz / E-core 1.2GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	Intel Iris Xe Graphics[5]
Core i7-1255U	10 (2 P-core + 8 E-core)	12	P-core 1.7GHz / E-core 1.2GHz	P-core 4.7GHz / E-core 3.5GHz	12MB	Intel Iris Xe Graphics[6]
Core i7-1260P	12 (4 P-core + 8 E-core)	16	P-core 2.1GHz / E-core 1.5GHz	P-core 4.7GHz / E-core 3.4GHz	18MB	Intel Iris Xe Graphics[7]
Core i7-1265U	10 (2 P-core + 8 E-core)	12	P-core 1.8GHz / E-core 1.3GHz	P-core 4.8GHz / E-core 3.6GHz	12MB	Intel Iris Xe Graphics[8]

Notes:

- [1] Intel P series processors are for special bid only in EMEA.
- [2], [3], [4], [5], [6], [7], [8] Intel Iris Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel Iris Xe Graphics will function as Intel UHD Graphics.

Operating System

Operating System\*\*

- Linux[1]
- Ubuntu Linux[2]
- Windows® 10 IoT Enterprise LTSC 2021[3]
- Windows 11 DG Windows 10 Pro 64[4]
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 Pro
- No operating system

Notes:

- [1], [2] Some features may not be supported on the system with Linux preload, including but not limited to Intel RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.
- [3] Windows 10 IoT Enterprise LTSC 2021 is for special bid only.
- [4] Windows 11 DG Windows 10 Pro 64 is for special bid only.

Graphics

Graphics\*\*

Graphics	Type	Memory	TGP	Key Features
Intel UHD Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12.1
Intel Iris Xe Graphics[1]	Integrated	Shared	Share CPU TDP	DirectX 12.1

Notes:

[1] Intel Iris Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel Iris Xe Graphics will function as Intel UHD Graphics.

Monitor Support

**Monitor Support**

Supports up to 4 independent displays (native display and 3 external monitors via HDMI®, USB-C® and Thunderbolt™)

- HDMI supports up to 3840x2160@60Hz
- USB-C supports up to 5120x3200@60Hz
- Thunderbolt supports up to 5120x3200@60Hz

Chipset

**Chipset**

Intel SoC (System on Chip) platform

Memory

**Max Memory**<sup>[1]</sup>

Up to 64GB DDR4-3200

**Memory Slots**

Two DDR4 SO-DIMM slots, dual-channel capable

**Memory Type**

DDR4-3200

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

Storage

**Storage Support**<sup>[1]</sup>

One drive, up to 1TB M.2 2242 SSD

**Storage Slot**

One M.2 2242 PCIe® 4.0 x4 slot

**Storage Type**

Disk Type	Interface	Offering	Security
M.2 2242 SSD	PCIe NVMe®, PCIe 4.0 x4	256GB / 512GB / 1TB	Opal 2.0

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo storage offerings.

Removable Storage

**Card Reader**

microSD card reader

Multi-Media

**Audio Chip**

High Definition (HD) Audio, Realtek® ALC3287 codec

**Speakers**

Stereo speakers, 2W x2, Dolby® Audio™

**Microphone**

Dual-microphone array, far-field, Dolby Voice

**Camera**<sup>\*\*</sup>

- FHD 1080p + IR hybrid, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus
- HD 720p, with privacy shutter, fixed focus

## Battery

### Battery\*\*

- Integrated Li-Polymer 42Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter
- Integrated Li-Polymer 57Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter
- Integrated Li-Polymer 63Wh battery

### Battery Life<sup>[1]</sup>

Configuration 1 (max battery life)

MobileMark® 2018: up to 12.1 hr with 832 performance score @200nits

JEITA 2.0: up to 18.2 hr @150nits

Local video playback: up to 20.8 hr @150nits

Alternate configuration 2

MobileMark 2018: up to 10.3 hr with 999 performance score @200nits

JEITA 2.0: up to 14.9 hr @150nits

Local video playback: up to 16.1 hr @150nits

Alternate configuration 3

MobileMark 2018: up to 6.7 hr with 994 performance score @200nits

JEITA 2.0: up to 9.7 hr @150nits

Local video playback: up to 10.3 hr @150nits

Notes:

[1] Configuration 1 (max battery life): FHD (non-touch), Intel i3-1215U, 4GB DDR4, Win 10, 57Wh battery, best power efficiency power mode

Alternate configuration 2: FHD (touch), Intel i5-1250P, 16GB DDR4, Win 10, 57Wh battery, best power efficiency power mode

Alternate configuration 3: FHD (non-touch), Intel i7-1260P, 64GB DDR4, Win 10, 42Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark 2018](#), [MobileMark 25](#), JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.

Actual battery life will vary depending on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.

The maximum capacity of the battery will decrease with time, ambient temperature and use.

Refer to [Microsoft® link](#) for more information about the Windows Performance power slider.

## Power Adapter

### Power Adapter\*\*<sup>[1][2]</sup>

- 45W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz<sup>[3]</sup>
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz<sup>[4]</sup>
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz<sup>[5]</sup>
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz<sup>[6]</sup>
- No power adapter<sup>[7]</sup>

Notes:

[1] AC adapter offerings depend on the country.

[2] No power adapter is for special bid only.

45W USB-C AC adapter and 65W USB-C slim AC adapter are NOT available in EMEA.

[3], [4] 45W USB-C AC adapter is NOT available in EMEA.

[5], [6] 65W USB-C slim AC adapter is NOT available in EMEA.

[7] No power adapter is for special bid only.

## DESIGN

## Display

### Display\*\*<sup>[1]</sup>

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
14"	HD (1366x768)	None	TN	220nits	Anti-glare	16:9	500:1	45% NTSC	45°/45°/15°/35°	-
14"	FHD (1920x1080)	None	IPS <sup>[2]</sup>	250nits	Anti-glare	16:9	800:1	45% NTSC	85°/85°/85°/85°	-
14"	FHD (1920x1080)	Multi-touch	IPS <sup>[3]</sup>	300nits	Anti-glare	16:9	1000:1	45% NTSC	85°/85°/85°/85°	-
14"	FHD (1920x1080)	None	IPS <sup>[4]</sup>	400nits	Anti-glare	16:9	1500:1	100% sRGB	85°/85°/85°/85°	Low power

Touchscreen

- On-cell multi-touch, supports 10-point touch
- Non-touch

Notes:

[1] Display with HD TN is for special bid in EMEA.  
Display with FHD 100% sRGB is for special bid in EMEA.  
[2], [3], [4] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad, 56 x 115 mm (2.24 x 4.53 inches)

Mechanical

Dimensions (WxDxH)<sup>[1]</sup>

Models	Dimensions
Aluminium (top), PC-CF (bottom) models	325.4 x 217 x 18.73 mm (12.81 x 8.54 x 0.74 inches)
Aluminium (top), PC-ABS (bottom) models	325.4 x 217 x 18.93 mm (12.81 x 8.54 x 0.75 inches)
PC-ABS (top), PC-CF (bottom) models	325.4 x 217 x 19.63 mm (12.81 x 8.54 x 0.77 inches)
PC-ABS (top), PC-ABS (bottom) models	325.4 x 217 x 19.83 mm (12.81 x 8.54 x 0.78 inches)

Weight<sup>[2]</sup>

Starting at 1.39 kg (3.06 lbs)

Case Color

Thunder black

Case Material<sup>\*\*</sup>

- Aluminium (top), PC-ABS (bottom)<sup>[3]</sup>
- Aluminium (top), PC-CF (bottom)<sup>[4]</sup>
- PC-ABS (top), PC-ABS (bottom)
- PC-ABS (top), PC-CF (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.  
[2] The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.  
[3], [4] Aluminium top cover is NOT available in EMEA.

CONNECTIVITY

## Network

### Ethernet

Gigabit Ethernet, 1x RJ-45, supports Wake-on-LAN

### WLAN + Bluetooth<sup>®</sup>\*\*<sup>[1]</sup>

- Intel Wi-Fi<sup>®</sup> 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card<sup>[2]</sup>
- Qualcomm<sup>®</sup> Wi-Fi 6E NFA725A, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1<sup>[3]</sup>
- Qualcomm Wi-Fi 6E QCNFA765, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card<sup>[4]</sup>
- Intel Wi-Fi 6E AX211, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1<sup>[5]</sup>
- Intel Wi-Fi 6E AX211, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card<sup>[6]</sup>
- No WLAN and Bluetooth

### WWAN\*\*

- Wireless WAN upgradable to 4G (with antenna ready)
- Quectel EM05-G, 4G LTE CAT4, M.2 card
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card<sup>[7]</sup>
- No support

### SIM Card

- Gemalto eSIM card (physical)
- No physical SIM card inbox

### NFC

- Near Field Communication<sup>[8]</sup>
- No support

#### Notes:

<sup>[1]</sup> Qualcomm QCNFA725 and Qualcomm QCNFA765 are NOT available in EMEA.

<sup>[2]</sup> Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.

Wi-Fi 6 full features might be limited by country-level restrictions.

<sup>[3]</sup>, <sup>[4]</sup>, <sup>[5]</sup>, <sup>[6]</sup> Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.

Wi-Fi 6E full features might be limited by country-level restrictions.

Wi-Fi 6E is only enabled on Windows 11 and operates as Wi-Fi 6 with Windows 10.

6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.

<sup>[7]</sup> CAT16 is NOT available in EMEA.

<sup>[8]</sup> NFC is for special bid in EMEA.

## Ports<sup>[1]</sup>

### Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 1x USB-C 3.2 Gen 1 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x Thunderbolt 4 / USB4<sup>®</sup> 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort 1.4)
- 1x HDMI 2.1, up to 4K/60Hz
- 1x microSD card reader
- 1x Ethernet (RJ-45)
- 1x Headphone / microphone combo jack (3.5mm)

### Optional Ports\*\*\*

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

#### Notes:

<sup>[1]</sup> The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt 3/4: 40 Gbit/s.

## Docking

### Docking

Various docking solutions supported via Thunderbolt or USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad® L14 Gen 3 \(Intel\)](#)

## Monitor Cable

### Monitor Cable\*\*\*

- Lenovo HDMI to DP Monitor Adapter
- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to VGA Adapter
- Lenovo USB-C to DisplayPort Adapter
- No monitor cable

## SECURITY & PRIVACY

## Security

### Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

### Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

### Smart Card Reader

- Smart card reader
- No smart card reader

### Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

### BIOS Security

- Power-on password
- Supervisor password
- NVMe password
- Self-healing BIOS

### Other Security

- Camera privacy shutter
- (Optional) IR camera for Windows Hello
- Glance by Mirametrix®
- Tile ready

## MANAGEABILITY

## System Management

### System Management\*\*

- Intel vPro® Enterprise<sup>[1]</sup>
- Intel vPro Essentials<sup>[2]</sup>
- Non-vPro

---

Notes:

[1], [2] Intel vPro offers a superset of DASH's defined capabilities.

## SERVICE

## Warranty

### Base Warranty\*\*

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)

- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service

## ENVIRONMENTAL

### Sustainability

#### Material

50% PCC recycled plastic used in speaker enclosure  
25-30% PCC recycled plastic used in the battery  
95% PCC recycled plastic used in standard 65W adapter  
Low-temperature solder  
90% recycled and/or sustainable packaging

### Operating Environment

#### Temperature<sup>[1]</sup>

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F ) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

#### Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

## ACCESSORIES

### Bundled Accessories

#### Bundled Accessories<sup>[1]</sup>

None

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for ThinkPad L14 Gen 3 \(Intel\)](#)

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Gold Registered<sup>[2]</sup>
- ErP Lot 3
- RoHS compliant
- TCO Certified

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

[2] EPEAT is registered where applicable, please see <https://www.epeat.net> for registration status by country.

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed



- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel



intel



intel



intel



intel